

CERTIFICATE OF EMC

CERTIFICATE NO.: SET2015-01563

Product: Group control landing call board
Model: BL2000-HQK-V* (*=9-9.99, indicate the different customer or/and Software function number)
Applicant: ShenYang Bluelight Automatic Technology Co., Ltd.
Address: No. 37 Shiji Road, Hunnan New District, Shenyang, China

This is to certify that, on the basis of the tests undertaken as per Report No. SET2015-01563, the submitted sample of the above item complies with:

EN61000-6-4:2007+A1:2011
EN61000-6-2:2005

and fulfils testing requirement of the EMC directive 2004/108/EC

Signed for and on behalf of
CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

EMC TEST REPORT

Report No.: SET2015-01563

Product: Component landing all board

Model No: BL2000-HQK-V* (*=9-9.99, indicate the different corner of and some machine number)

Applicant: Shen Yang Blahat Automatic Technology Co., Ltd.

Address: No. 37 Shijie Road, Humnan New District, Shenyang China

Issued by: CCIC Shenzhen Electronic Product Testing (Shenzhen) CO., Ltd.

Lab location: Building 28/29, Shijong Xili Industrial Area, Xili Street, Nanshan District, Shenzhen, Guangdong, China

Tel: 86 755 26627338 **Fax:** 86 755 26627238



This report consists of 23 pages in total. It may be duplicated completely or legally without the permission of the applicant. It should not be reproduced or distributed in any form without the written consent of the applicant. The client should not use the test results to claim product endorsement by CCIC-SET. The test results shall be invalid if the test is not performed by the test engineer specified in the report. Any objections must be raised to CCIC-SET within 15 days since the date when the report is issued. It will not be taken into consideration beyond this limit.

查询码: 6PA7ZR5b

Report

Product.....: Group control landing call board

Model No.....: BL2000-HQK-V* (*=9-9.99, indicate the different customer or/and Software function number)

Brand Name.....: /

Applicant.....: ShenYang Bluelight Automatic Technology Co., Ltd.

Applicant Address.....: No. 37 Shiji Road, Hunnan New District, Shenyang, China

Manufacturer.....: ShenYang Bluelight Automatic Technology Co., Ltd.

Manufacturer Address.....: No. 37 Shiji Road, Hunnan New District, Shenyang, China

Test Standards.....: EN61000-6-4:2007+A1:2011 Electromagnetic compatibility (EMC) -- Part 6-4: Generic standards - Emission standard for industrial environments
EN61000-6-2:2005 Electromagnetic compatibility (EMC) -- Part 6-2: Generic standards - Immunity for industrial environments

Test Result.....: Pass

Tested by: _____ Feb. 06. 2015
Signature, Date

Reviewed by.....: _____ Feb. 06. 2015
Signature, Date

Approved by.....: _____ Feb. 06. 2015
Signature, Date



Table of Contents

Report.....	2
1 General Information	5
1.1 Description of EUT	5
1.2 Object	5
2 Test Facilities and Conditions	5
2.1 Environmental Conditions.....	5
2.2 Measurement Uncertainty.....	5
2.3 Test Standards and References.....	5
2.4 List of Equipment Used.....	7
3 Emission Tests.....	8
3.1 EUT Setup and Operating Conditions.....	8
3.2 Radiated Disturbance Measurement.....	8
3.2.1 Limit Radiated Disturbance	8
3.2.2 Test Setup.....	8
3.2.3 Test Results.....	9
4 Immunity Tests.....	11
4.1 EUT Setup and Operating Conditions.....	11
4.2 Performance Criteria	11
4.3 Electrostatic Discharge Immunity Tests.....	11
4.3.1 Test Specification	11
4.3.2 Test Setup.....	12
4.3.3 Test Results.....	12
4.4 Radiated, Radio Frequency Electromagnetic Field Immunity Tests.....	13
4.4.1 Test Specification	13
4.4.2 Test Setup.....	13
4.4.3 Test Results.....	14

4.5 Electrical Fast Transient Immunity Test.....	14
4.5.1 Test Specimen	14
4.5.2 Test Setup.....	14
4.5.3 Test Result.....	15
4.6 Surge Immunity Test.....	15
4.6.1 Test Specimen	15
4.6.2 Test Setup.....	15
4.6.3 Test Result.....	15
4.7 Immunity to Conducted Disturbances Induced by RF Fields.....	16
4.7.1 Test Specimen	16
4.7.2 Test Setup.....	16
4.7.3 Test Result.....	16
4.8 Power Frequency Magnetic Field Immunity Test.....	17
4.8.1 Test Specimen	17
4.8.2 Test Setup.....	17
4.8.3 Test Result.....	17
Appendix I Photographs of the EUT.....	18
Appendix II Photographs of EMC Test Configuration	19

1 General Information

1.1 Description of EUT

Product: Gopont1 landingall board
Model No.: BL2000-HQK-V9
Brand Name: /
Serial No.: /
Rating: Inp24V DC
Accessories: /

NOTE:

1. For more detailed easdesp n about the EUT, please refer to the User Manual.
2. The applicable model is BL2000-HQK-V* (*=9-9.99, indicate the different customer or brand. Some model numbers. Model differences do not affect the performance of EMC. All tests were performed on Model BL2000-HQK-V9 and are representative of other models.
3. The highest frequency of the internal noise of the EUT is below 108 MHz. The added emission measurement shall be made up to 1GHz.

1.2 Objective

Perform Electromagnetic Interference (EMI) and Electromagnetic Susceptibility (EMS) tests for CE Marking.

2 Test Facilities and Configuration

2.1 Environmental Conditions

During the measurement, the environmental conditions were within the following ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

2.2 Measurement Uncertainty

The uncertainty is calculated using the methods specified in the Guide to the Expression of Uncertainty in Measurement (GUM) published by ISO.

- Uncertainty to Radiated Emission, $U_c = \pm 7\text{dB}$

2.3 Test Standards and Results

The EUT has been tested according to the following standards



2.4 List of Equipments Used

Description	Manufacturer	Model No.	Calibration Date	Serial No.
Test Receiver	ROHDE&SCHWARZ	ESCI	Jun .10, 2015	A0902601
Broadband Ant Anechoic Chamber	ROHDE&SCHWARZ	VULB 09160	Jun .10, 2015	A0805560

3 Emission Test

3.1 EUT Setup and Operating Conditions

The EUT is powered by 24V DC mains. The EUT is continuously operated during the test.

3.2 Radiated Disturbance Measurement

3.2.1 Limits of Radiated Disturbance

Frequency range (MHz)	Quasi peak limits(dB μ V/m), at 10m measurement distance
30 -230	40
230 - 1000	47


Notes:

- (1) The lower limit shall apply at the antenna frequency.
- (2) Additional points may be required for co-site interference cases.

3.2.2 Test Setup



1. Electromagnetic interference

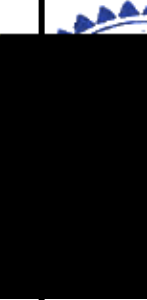

4 Immunity Test

4.1 EUT Setup and Operating Conditions

Same as 3.1.

4.2 Performance Criteria


Criterion A	The apparatus shall continue to operate as intended. No degradation of performance or loss of function shall occur below performance level specified by the manufacturer when the apparatus is intended.
Criterion B	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function shall occur below performance level specified by the manufacturer when the apparatus is intended.
Criterion C	Temporary loss of function shall occur, provided the function is self-recoverable or can be restored by the operator in one of the controls.

4.3 Electrostatic Discharge Immunity Test

4.3.1 Test Specification

Basic Standard:	IEC 61000-4-2
Discharge Impedance	330 Ω / 150 pF
Discharge Voltage:	Air Discharge: 8 kV Contact Discharge: 4 kV
Polarity:	Pos / Neg
Number of Discharge:	Minimum 20 times at each test point
Discharge Mode:	Single discharge
Discharge Period:	1-second minimum
Criterion:	B

4.3.2 Test Setup

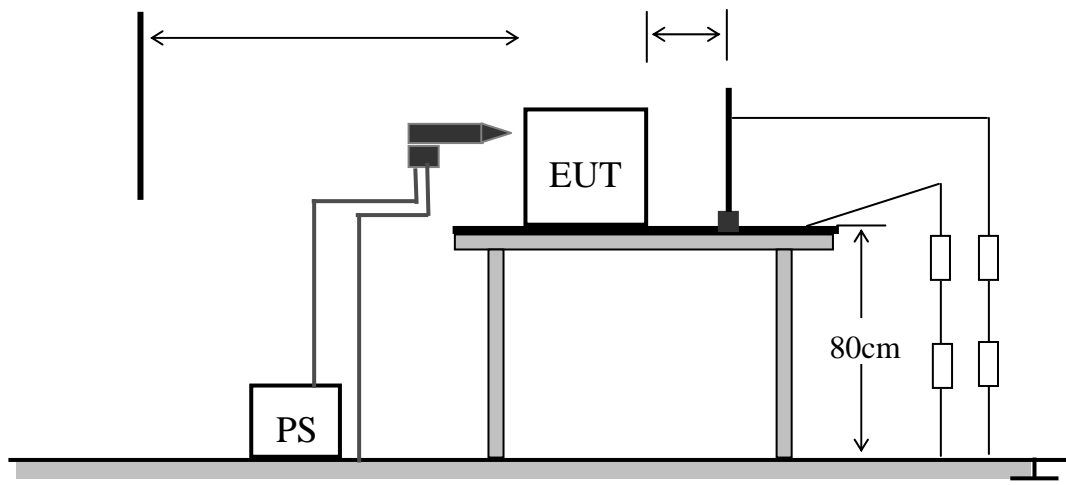

For the actual test condition, please refer to Appendix II
 Condition.

Photographs of the Test

4.3.3 Test Result

Test Points	Discharge Level (kV)	Discharge Mode	Observation	Comply with Criterion
Scæen	2, 4, 6, 8	Air	Not(1)	A
HCP	f 2, 4	Contact	Not(1)	A
VCP	f 2, 4	Contact	Not(1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.4 Radiated, Radio Frequency Electromagnetic Field Immunity Test

4.4.1 Test Specification

Basic Standard:	EN 61000-4-3		
Frequency Range:	80 MHz-1000MHz	1.4GHz-2.0GHz	2.0GHz-2.7GHz
Field Strength:	10V/m	3V/m	1V/m
Modulation:	1 kHz sine wave, 80%, AM modulation		
Frequency Step:	1% of fundamental		
Polarity of Antenna:	Horizontal and Vertical		
Test Distance:	3m		
Antenna Height:	1.5m		
Dwell Time:	3 seconds		
Criterion:	A		

4.4.2 Test Setup

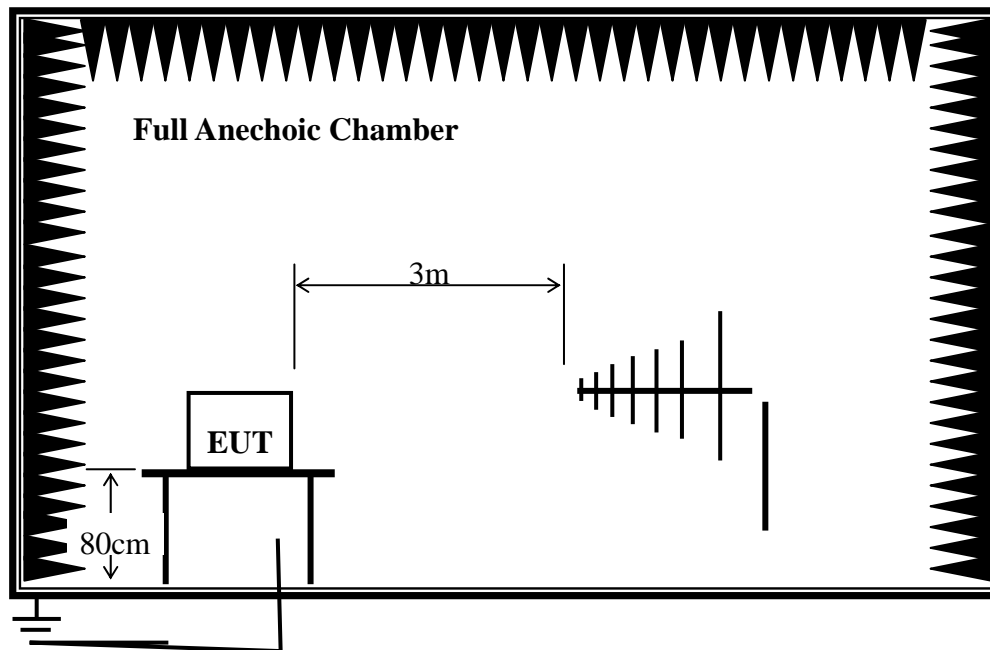

4.4.3 Test Result

Frequency	Polarity	Azimuth	Field Strength (V/m)	Observation	Comply with Criterion
80-1000 MHz	V&H	0,90, 80, 270	10	Not(1)	A
1.4-2.0GHz	V&H	0,90, 80, 270	3	Not(1)	A
2.0-2.7GHz	V&H	0,90, 80, 270	1	Not(1)	A

NOTE:

(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.5 Electrical Fast Transient/Burst Immunity Test

4.5.1 Test Specification

Basic Standard:	IEC 61000-4-4
Test Voltage:	DC. Power pt 2 kV, Signal pt 1 kV
Polarity:	Pos/Neg
Impulse Frequency:	5 kHz
Impulse wave shape:	5/50 ns
Burst Duration:	15ms
Burst Period:	300ms

For the actual test condition, please refer to Appendix II
 Condition.

Photographs of the Test

4.5.3 Test Result

Test Point	Polarity	Test Level (kV)	Observation	Comply with Criterion
DC. per	+/-	2	Not (1)	A
Signal pt	+/-	1	Not (1)	A

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.6 Surge Immunity Test

4.6.1 Test Specification

Basic Standard:	IEC 61000-4-5
Waveform:	Voltage 1.2/50 μ s, Current 8/20 μ s
Test Voltage:	DC port line to line 0.5 kV, line to earth 0.5 kV
Polarity:	Pos/Neg
Repetition Rate:	60sc
Times:	5 ime/each condition.
Criterion:	B

4.6.2 Test Setup

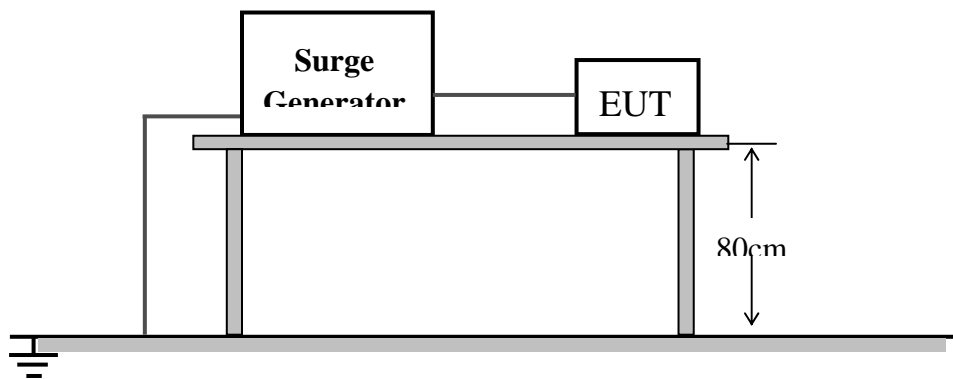

4.6.3 Test Result

Coupling Line	Polarity	Voltage (kV)	Observation	Comply with Criterion
DC per Line-Line	+/-	0.5	Not (1)	B

NOTE:


(1). The EUT continued to operate as intended. No degradation of performance was observed.

4.7 Immunity to Conducted Disturbances Induced by RF Fields

4.7.1 Test Specification

Basic Standard:	IEC 61000-4-6
Frequency Range:	0.15 MHz-80 MHz
Field Strength:	10V
Modulation:	1 kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1% of fundamental
Coupled Cable:	DC. power line
Coupling Device:	Capacitor clamp
Criterion:	A

4.7.2 Test Setup

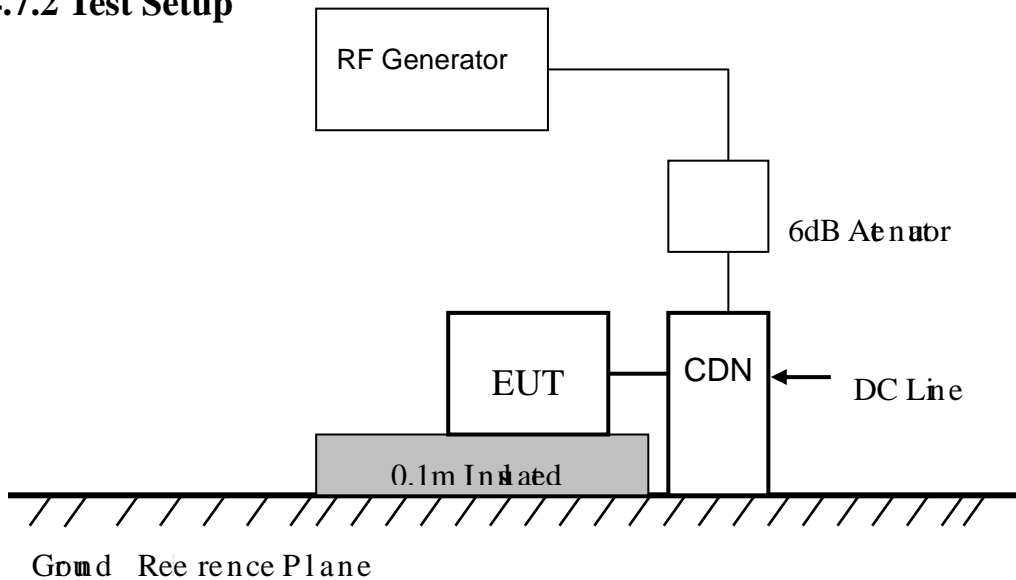

4.7.3 Test Result

Test Point	Frequency	Field Strength (Vrms)	Observation	Comply with criterion
DC Power Line	0.15 -80 MHz	10	Note(1)	A
Signal pt	0.15 -80 MHz	10	Note (1)	A

NOTE:

(1). The EUT continued to operate as intended. No degradation of performance was observed.


4.8 Power Frequency Magnetic Field Immunity Test

4.8.1 Test Specification

Basic Standard:	IEC 61000-4-8
Frequency Range:	50Hz





Appendix I ÖPhotographs of the EUT

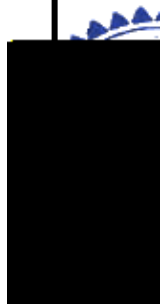

Appendix II ÖPhotographs of EMC Test Configuration

1. Radiated Field Strength Measurement

2. Electrostatic Discharge Immunity Test

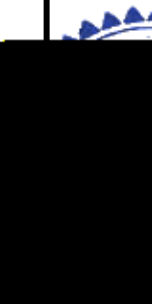

5. Electrical Fast Transient/Burst Immunity Test

6. Surge Immunity Test

7. Immunity to Conducted Disturbances Induced by RF Fields

STATEMENT

